


# Bambu Lab A1 Combo 3D Printer with AMS (China Mainland Version)

**LKR 270,463.20**

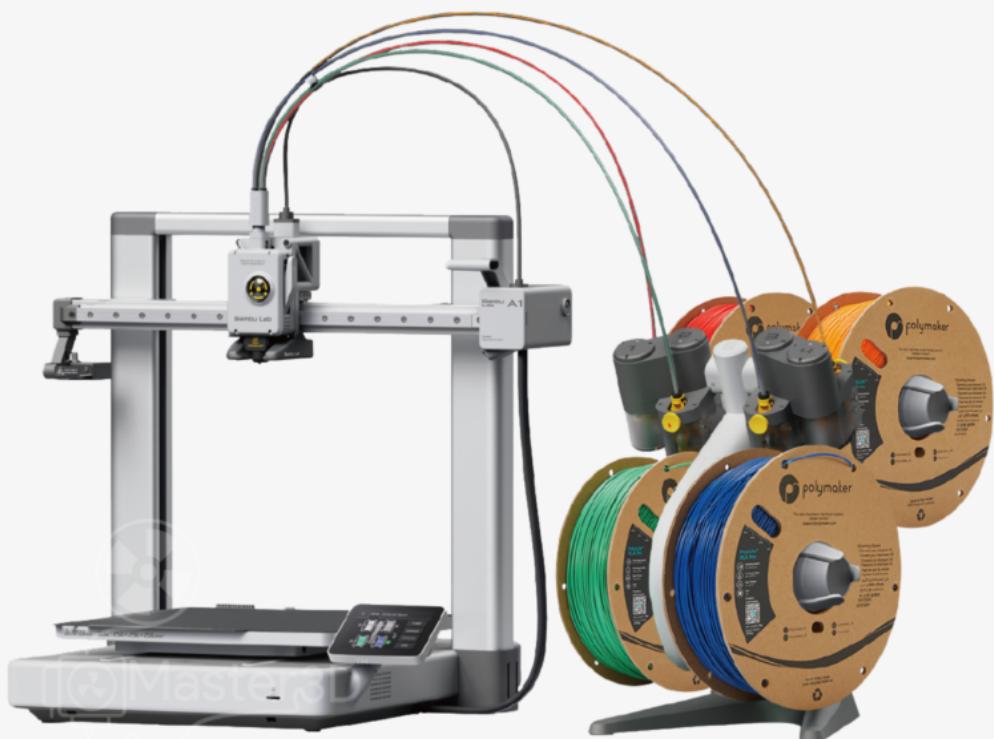

**The Filaments in the Picture are Sold separately**

- **6-Month Warranty included** for worry-free operation.
- **Multi-Colour Printing:** Unlock the potential with AMS lite for vibrant multi-colour prints.

- **Fast and Precise:** Typical printing speed of 60 mm/s and max speed of 120 mm/s with a layer resolution of 0.05 - 0.4 mm.
- **Easy Setup:** Full-auto calibration for hassle-free printing right out of the box.
- **Quiet Operation:** Enjoy a serene workspace with active motor noise canceling.

## **Bambu Lab A1 Combo 3D Printer (China Mainland Version)**

### **Compact Yet Versatile: Your Go-To 3D Printing Solution**

Discover the power of precision with the **Bambu Lab A1 Combo 3D Printer**. This all-in-one 3D printer is designed to cater to both beginners and professionals, offering a seamless printing experience right out of the box. With its compact build and advanced features, the A1 Combo is perfect for creating detailed models, prototypes, and more.

At *Master3D*, we know quality matters. The **Bambu Lab A1 Combo 3D Printer**, with its remarkable build volume and cutting-edge technology, brings your creative visions to life with ease. Its user-friendly interface and robust construction make it a reliable addition to any workspace, ensuring you get the best results every time.

### **Key Features of the Bambu Lab A1 Combo 3D Printer:**

- **Printing Technology:** FDM (Fused Deposition Modeling)
- **Build Volume:** 256 x 256 x 256 mm
- **Typical Printing Speed:** 150 mm/s
- **Max. Printing Speed:** 500 mm/s
- **Layer Resolution:** 0.05 - 0.4 mm

### **Why Choose the A1 Combo?**

The **Bambu Lab A1 Combo 3D Printer** is not just a machine; it's a tool to bring your ideas to life. With features like automatic bed leveling and an all-metal hot end, you can trust this printer to deliver smooth, precise prints every time. Available at *Master3D*, this printer supports a range of filaments, making it versatile for various projects.

### **User-Friendly and Versatile**

Whether you're working from your computer or using the touchscreen interface, the **Bambu Lab A1 Combo 3D Printer** integrates seamlessly into your workflow. Its sturdy yet lightweight frame ensures easy transport and setup. Plus, with full-auto calibration, you can spend less time adjusting settings and more time printing.

## FAQs

**1. Q. What materials can I use with the A1 Combo?**

A. The A1 Combo supports a variety of filaments, including PLA, ABS, PETG, and TPU, thanks to its advanced extruder system.

**2. Q. How does the automatic bed levelling work?**

A. The printer features a sensor-based levelling system that automatically adjusts the bed height, ensuring consistent and precise layer adhesion.

**3. Q. Is the A1 Combo suitable for beginners?**

A. Absolutely! The intuitive interface and detailed manual make it easy for users of all skill levels to get started and achieve great results.

**4. Q. Does the Bambu Lab A1 Combo 3D Printer (China Mainland Version) support cloud printing?**

A. This version does not support connection to the Bambu Lab cloud; it only allows printing via an SD card or through LAN mode.

Ready to transform your ideas into reality? The **Bambu Lab A1 Combo 3D Printer**, available at *Master3D*, is your ticket to exploring new dimensions in 3D printing.

Feature	A1 Combo Specification
<b>Build Volume (W x D x H)</b>	256 x 256 x 256 mm
<b>Printing Technology</b>	FDM (Fused Deposition Modeling)
<b>Typical Printing Speed</b>	120 mm/s
<b>Max. Printing Speed</b>	500 mm/s
<b>Layer Resolution</b>	0.05 - 0.4 mm
<b>Nozzle Diameter</b>	0.4 mm (Included), 0.2 mm, 0.6 mm, 0.8 mm
<b>Nozzle Temperature</b>	Max Hot End Temperature 300 °C
<b>Build Plate Surface</b>	Bambu Textured PEI Plate (Included), Bambu High Temperature Plate (Smooth PEI), Bambu Cool Plate

<b>Feature</b>	<b>A1 Combo Specification</b>
<b>Max Build Plate Temperature</b>	100 °C
<b>Extruder Type</b>	All-Metal
<b>Max Speed of Tool Head</b>	500 mm/s
<b>Max Acceleration of Tool Head</b>	10 m/s <sup>2</sup>
<b>Filament Compatibility</b>	PLA, PETG, TPU, PVA (Ideal); ABS, ASA, PC, PA, PET, Carbon/Glass Fiber Reinforced Polymer (Not Recommended)
<b>User Interface</b>	Touchscreen
<b>Chamber Monitoring Camera</b>	Low Frame Rate Camera (Up to 1080P), Timelapse Supported
<b>Sensors</b>	Filament Run Out Sensor, Filament Odometry, Filament Tangle Sensor, Power Loss Recovery
<b>Physical Dimensions</b>	A1 Combo • Package size 546*5236*420 mm, Gross weight (AMS lite included) 14.2 kg
<b>Electrical Requirements</b>	100-240 VAC, 50/60 Hz, 1000 W @ 220 V, 350W @ 110 V